

**VALENT® X Wet Location 24V**  
**High Density LED Tape Light**

Precision-engineered, high density tape light for wet locations (IP65).  
Up to 500+ lumens per foot with 95+ CRI / 90+ R9.

Date \_\_\_\_\_  
Project Notes \_\_\_\_\_



**FEATURES**

- Dense LED placement for uninterrupted linear light
- 500 Lumen output
- 95+ CRI
- 1.32 inch cuttable increments
- Precision color rendering with 90+ R9 value
- Ultra high lumen output
- 12 Year limited warranty



**ORDERING CODES**

Order spools, and components for field assembly

**OPTIONAL ORDERING CODES**

Add Assembly Preferences, Finish, Lens, Mounting, Driver, and Delivery

	Voltage	Model	CCT	Length	Channels	Finish	Lens	Mounting	Driver	Delivery		
DI												
	24V (24V Volt)	VLX5	27 (2700K) 30 (3000K) 35 (3500K) 40 (4000K)	W016 (16.4 feet) W100 (100 feet)	A1 (A1) S2 (S2) S45 (S45) CA (Canal)	SL (Slim) SQ (Square) 45 (45°) 16 (16mm Square)	RC20 (20mm Round) SQ20 (20mm Square) MI1 (1-inch Mud-In) MI2 (2-inch Mud-In)	AL (Aluminum) BL (Black) WH (White) CLT (Arch. Clear Lens) FRT (Arch. Frosted Lens) OPT (Opal Lens) PD (Prem. Diffusion Lens)	*blank* (Classic Frosted Lens) BL (Black Lens) CLT (Arch. Clear Lens) FRT (Arch. Frosted Lens) OPT (Opal Lens) PD (Prem. Diffusion Lens)	3M (3M Adhesive) MC (Mounting Clip) UC (U-Clip) VC (Vertical Clip) HNG (Hanging Hardware) RC (Rotating Clip)	ELV (Electronic) O/O (On / Off) LUT (Lutron) 010 (0-10V) PoE (Power over Ethernet)	Field Assembly Factory + Field (Hybrid) Factory Assembly
<i>*See page 2 for Channel / Lens / Mounting compatibility</i>												

**VALENT® X Wet Location - SPECIFICATION TABLE**

<b>Models</b>	<b>24V-VLX5</b>
<b>Voltage</b>	<b>24VDC</b>
<b>Wattage</b>	<b>4.6W/ft.</b>
Lumens	2400K 466 Lm/ft. 2700K 437 Lm/ft. 3000K 469 Lm/ft. 3500K 492 Lm/ft. 4000K 480 Lm/ft.
Cut Points	1.32 in.
Max Run (ft.)	30 ft.
CRI	95+
Dimensions	0.55 x 0.22 in. (L x W x H)
TM-21 (LM-80)	>50,000 hours
Environment	Outdoor / Wet Location (IP65)
Lead Wire A	36 in. Bare Lead 20/2 AWG UL 2464 Wire with Strain Relief
Lead Wire B	36 in. Bare Lead 20/2 AWG UL 2464 Wire with Strain Relief
LED Chips	72/ft.
Chip Type	2835
Certification	UL Listed 2108
Warranty	12 Year

**VALENT® X Wet Location 24V**  
High Density LED Tape Light

Precision-engineered, high density tape light for wet locations (IP65).  
Up to 500+ lumens per foot with 95+ CRI / 90+ R9.

Date \_\_\_\_\_

Project Notes \_\_\_\_\_



**CHANNEL / LENS / MOUNTING COMPATIBILITY**

Channel	Compatible Lenses	Available Finishes	Mounting Options
<b>A1 (A1)</b>	FRT	AL / WH / BL	UC
<b>S2 (S2)</b>	*blank*	AL	UC
<b>S45 (S45)</b>	*blank*	AL	UC
<b>CA (Canal)</b>	OPT	AL / WH / BL	UC
<b>SL (Slim)</b>	*blank* / CLT / FRT / BL / PD	AL / WH / BL	MC / 3M / MAG
<b>SQ (Square)</b>	*blank* / CLT / FRT / BL / PD	AL / WH / BL	MC / VC / RC / HNG
<b>45 (45°)</b>	*blank* / CLT / FRT / BL / PD	AL / WH / BL	MC / VC / RC / HNG
<b>16 (16mm Square)</b>	FRT	AL	MC
<b>RC20 (20mm Round)</b>	*blank*	AL	UC
<b>SQ20 (20mm Square)</b>	*blank*	AL	UC
<b>MI1 (1-inch Mud-In)</b>	OPT	AL	
<b>MI2 (2-inch Mud-In)</b>	OPT	AL	

**LEGEND**

Lens		Finish		Mounting	
<b>*blank*</b>	Classic Frosted Lens	<b>AL</b>	Aluminum	<b>3M</b>	3M Adhesive
<b>BL</b>	Black Lens	<b>WH</b>	White	<b>HNG</b>	Hanging Hardware
<b>CLT</b>	Architectural Clear Lens	<b>BL</b>	Black	<b>MAG</b>	Magnetic Clip
<b>FRT</b>	Architectural Frosted Lens			<b>MC</b>	Mounting Clip
<b>OPT</b>	Opal Lens			<b>RC</b>	Rotating Clip
<b>PD</b>	Premium Diffusion Lens			<b>UC</b>	U-Clip
				<b>VC</b>	Vertical Clip

**VALENT® X Wet Location 24V**  
High Density LED Tape Light

Precision-engineered, high density tape light for wet locations (IP65).  
Up to 500+ lumens per foot with 95+ CRI / 90+ R9.

Date \_\_\_\_\_

Project Notes \_\_\_\_\_



<b>12</b> Year Warranty	<b>IP65</b>	<b>24</b> VDC	<b>NEC</b> RATED CLOSET RATED	<b>TITLE</b> <b>24</b>
-------------------------------	-------------	------------------	-------------------------------------	---------------------------

**RECOMMENDED CHANNELS**

MODEL	DIAGRAM	INCLUDED ACCESSORIES	CONNECTION OPTIONS	IN CHANNEL DIFFUSION	TECHNICAL RATINGS	MOUNTING OPTIONS WITH DIMENSIONS
<b>A1 Channel</b> DI-CHB-A1 (A1) 48", 96" Aluminum, White, Black For 14mm Tape Lights or smaller	Height (H): 0.81 in. Width (W): 0.87 in. Interior Depth (ID): 0.45 in. Interior Width (IW): 0.79 in. 	48" Aluminum, Black, & White Channels • 48 in. channel & lens • 2x surface mounting clips • 1 retaining clip • End caps: 1x open, 1x closed. 96" Aluminum, Black, & White Channels • 90 in. channel & lens • 4x surface mounting clips • 2x strain relief clip • End caps: 2x open, 2x closed, 2x slotted	14mm Tape Light: Soldered Lead Only	Architectural Frosted Lens VLX5: Dotless	• Beam Angle: 120° Architectural Frosted Lens • Light Loss: 30% • CCT Shift: -35K • IP Rating Shift: IP40	U-Clip: 0.82 × 0.88 in. (H x W)
<b>S2 Channel</b> DI-CHB-S2 (S2) 48", 96" Aluminum For 14mm Tape Lights or smaller	Height (H): 0.57 in. Width (W): 0.74 in. Interior Depth (ID): 0.34 in. Interior Width (IW): 0.63 in. 	48 in. Channel & Frosted Lens, 1 open end cap, 1 closed end cap, 2 mounting clips, 2 mounting screws 96 in. Channel & Frosted Lens, 2 open end cap, 2 closed end cap, 4 mounting clips, 4 mounting screws	14mm Tape Light: Soldered Lead Only	Classic Frosted Lens VLX5: Dotless	• Beam Angle: 120° Classic Frosted Lens • Light Loss: 20% • CCT Shift: -40K • IP Rating Shift: IP40	U-Clip: 0.58 × 0.75 in. (H x W)
<b>S45 Channel</b> DI-CHB-S45 (S45) 48", 96" Aluminum For 14mm Tape Lights or smaller	Height (H): 0.78 in. Width (W): 0.78 in. Interior Depth (ID): 0.54 in. Interior Width (IW): 0.6 in. 	48 in. Channel & Frosted Lens, 1 open end cap, 1 closed end cap, 2 mounting clips, 2 mounting screws 96 in. Channel & Frosted Lens, 2 open end cap, 2 closed end cap, 4 mounting clips, 4 mounting screws	14mm Tape Light: Soldered Lead Only	Classic Frosted Lens VLX5: Dotless	• Beam Angle: 120° Classic Frosted Lens • Light Loss: 20% • CCT Shift: -40K • IP Rating Shift: IP40	U-Clip: 0.79 × 0.79 in. (H x W)
<b>Canal Channel</b> DI-CPCHB-CAN (CA) 48", 96" Aluminum, White, Black For 14mm Tape Lights or smaller	Height (H): 0.59 in. Width (W): 0.69 in. Interior Depth (ID): 0.54 in. Interior Width (IW): 0.61 in. 	48" Aluminum, Black, & White Channels • 48 in. channel & opal lens • 2x surface mounting clips • End caps: 1x open, 1x closed. 96" Aluminum, Black, & White Channels • 96 in. channel & opal lens • 4x surface mounting clips • End caps: 2x open, 2x closed.	14mm Tape Light: Soldered Lead Only	Opal Lens VLX5: Dotless	• Beam Angle: 120° Opal Lens • Light Loss: 55% • CCT Shift: -200K • IP Rating Shift: IP40	U-Clip: 0.6 × 0.7 in. (H x W)

**VALENT® X Wet Location 24V**  
High Density LED Tape Light

Precision-engineered, high density tape light for wet locations (IP65).  
Up to 500+ lumens per foot with 95+ CRI / 90+ R9.

Date \_\_\_\_\_

Project Notes \_\_\_\_\_



**RECOMMENDED CHANNELS**

MODEL	DIAGRAM	INCLUDED ACCESSORIES	CONNECTION OPTIONS	IN CHANNEL DIFFUSION	TECHNICAL RATINGS	MOUNTING OPTIONS WITH DIMENSIONS
<b>Slim Channel</b> DI-CPCHB-SL  (SL) 48", 96" Aluminum, White, Black For 14mm Tape Lights or smaller		48" Aluminum, Black, & White Channels • 48 in. channel & lens • 2x surface mounting clips • End caps: 1x open, 1x closed  96" Aluminum, Black, & White Channels • 96 in. channel & lens • 4x surface mounting clips • end caps: 2x open, 2x closed	<p>14mm Tape Light: Soldered Lead Only</p>	<p>Architectural Frosted Lens VLX5: Semi-Diffused</p> <p>Premium Diffusion Lens VLX5: Dotless</p> <p>For diffusion options not listed, refer to Slim Channel Specification Sheet.</p>	<ul style="list-style-type: none"> <li>• Beam Angle: 120°</li> <li>• Architectural Clear Lens               <ul style="list-style-type: none"> <li>• Light Loss: 10%</li> <li>• CCT Shift: -20K</li> </ul> </li> <li>• Architectural Frosted Lens               <ul style="list-style-type: none"> <li>• Light Loss: 30%</li> <li>• CCT Shift: -35K</li> </ul> </li> <li>• Classic Frosted Lens               <ul style="list-style-type: none"> <li>• Light Loss: 20%</li> <li>• CCT Shift: -40K</li> </ul> </li> <li>• Black Lens               <ul style="list-style-type: none"> <li>• Light Loss: 90%</li> <li>• CCT Shift: -350K</li> </ul> </li> <li>• Premium Diffusion Lens               <ul style="list-style-type: none"> <li>• Light Loss: 10%</li> <li>• CCT Shift: -30K</li> </ul> </li> <li>• IP Rating Shift: IP40</li> </ul>	<p>Slim Mount: 0.54 × 0.87 in. (H x W)</p> <p>3M Adhesive: 0.48 × 0.82 in. (H x W)</p> <p>Magnetic U-Clip: 0.59 × 0.82 in. (H x W)</p> <p>Premium Diffusion: 0.96 × 0.82 in. (H x W)</p>
<b>Square Channel</b> DI-CPCHB-SQ  (SQ) 48", 96" Aluminum, White, Black For 14mm Tape Lights or smaller		48" Aluminum Channel • 48 in. channel & frosted cover • Mounting hardware • End caps: 1x open, 1x closed.  48" Black & White Channels • 48 in. channel & clear, or frosted lens • 4x surface mounted clips • 2x End-to-end interconnects  96" Aluminum Channel • 96 in. channel & frostedcover • Mounting hardware • End caps: 2x open, 2x closed.  96" Black & White Channels • 96 in. channel & clear, or frosted lens • 4x surface mounted clips • 2x End-to-end interconnects	<p>14mm Tape Light: Soldered Lead Only</p>	<p>Architectural Frosted Lens VLX5: Semi-Diffused</p> <p>Premium Diffusion Lens VLX5: Dotless</p> <p>For diffusion options not listed, refer to Square Channel Specification Sheet.</p>	<ul style="list-style-type: none"> <li>• Beam Angle: 120°</li> <li>• Architectural Clear Lens               <ul style="list-style-type: none"> <li>• Light Loss: 10%</li> <li>• CCT Shift: -20K</li> </ul> </li> <li>• Architectural Frosted Lens               <ul style="list-style-type: none"> <li>• Light Loss: 30%</li> <li>• CCT Shift: -35K</li> </ul> </li> <li>• Classic Frosted Lens               <ul style="list-style-type: none"> <li>• Light Loss: 20%</li> <li>• CCT Shift: -40K</li> </ul> </li> <li>• Black Lens               <ul style="list-style-type: none"> <li>• Light Loss: 90%</li> <li>• CCT Shift: -350K</li> </ul> </li> <li>• Premium Diffusion Lens               <ul style="list-style-type: none"> <li>• Light Loss: 10%</li> <li>• CCT Shift: -30K</li> </ul> </li> <li>• IP Rating Shift: IP40</li> </ul>	<p>Chromapath Surface Mount: 0.61 × 0.82 in. (H x W)</p> <p>Vertical Mount: 0.61 × 0.82 in. (H x W)</p> <p>Rotating Mount: 1.29 × 0.82 in. (H x W)</p> <p>Hanging Mount: 1.51 × 0.82 in. (H x W)</p> <p>Premium Diffusion: 1.13 × 0.82 in. (H x W)</p>
<b>45° Channel</b> DI-CPCHB-45  (45) 48", 96" Aluminum, White, Black For 14mm Tape Lights or smaller		48" Aluminum, Black, & White Channels • 48 in. channel & clear, or frosted lens • 4x surface mounted clips • 2x End-to-end interconnects  96" Aluminum Channel • 96 in. channel & clear, or frosted lens • 8x surface mounted clips • 4x End-to-end interconnects  96" Black & White Channels • 96 in. channel & clear, or frosted lens • 4x surface mounted clips • 2x End-to-end interconnects	<p>14mm Tape Light: Soldered Lead Only</p>	<p>Architectural Frosted Lens VLX5: Semi-Diffused</p> <p>Premium Diffusion Lens VLX5: Dotless</p> <p>For diffusion options not listed, refer to 45° Channel Specification Sheet.</p>	<ul style="list-style-type: none"> <li>• Beam Angle: 120°</li> <li>• Architectural Clear Lens               <ul style="list-style-type: none"> <li>• Light Loss: 10%</li> <li>• CCT Shift: -20K</li> </ul> </li> <li>• Architectural Frosted Lens               <ul style="list-style-type: none"> <li>• Light Loss: 30%</li> <li>• CCT Shift: -35K</li> </ul> </li> <li>• Classic Frosted Lens               <ul style="list-style-type: none"> <li>• Light Loss: 20%</li> <li>• CCT Shift: -40K</li> </ul> </li> <li>• Black Lens               <ul style="list-style-type: none"> <li>• Light Loss: 90%</li> <li>• CCT Shift: -350K</li> </ul> </li> <li>• Premium Diffusion Lens               <ul style="list-style-type: none"> <li>• Light Loss: 10%</li> <li>• CCT Shift: -30K</li> </ul> </li> <li>• IP Rating Shift: IP40</li> </ul>	<p>Chromapath Surface Mount: 1 × 0.67 in. (H x W)</p> <p>Vertical Mount: 1 × 0.67 in. (H x W)</p> <p>Rotating Mount: 1.68 × 0.67 in. (H x W)</p> <p>Hanging Mount: 1.9 × 0.67 in. (H x W)</p> <p>Premium Diffusion: 1.52 × 0.67 in. (H x W)</p>
<b>16mm Square Channel</b> DI-CPCHB-16MM  (16) 48", 96" Aluminum For 14mm Tape Lights or smaller		48 in. channel & Architectural Frosted Lens 2x surface mounting clips End caps: 1x open, 1x closed.  96 in. channel & Architectural Frosted Lens 4x surface mounting clips End caps: 2x open, 2x closed.	<p>14mm Tape Light: Soldered Lead Only</p>	<p>Architectural Frosted Lens VLX5: Dotless</p>	<ul style="list-style-type: none"> <li>• Beam Angle: 120°</li> <li>• Architectural Frosted Lens               <ul style="list-style-type: none"> <li>• Light Loss: 30%</li> <li>• CCT Shift: -35K</li> </ul> </li> <li>• Black Lens               <ul style="list-style-type: none"> <li>• Light Loss: 90%</li> <li>• CCT Shift: -350K</li> </ul> </li> <li>• IP Rating Shift: IP40</li> </ul>	<p>Mounting Clip: 0.89 × 0.77 in. (H x W)</p>

**VALENT® X Wet Location 24V**  
High Density LED Tape Light

Precision-engineered, high density tape light for wet locations (IP65).  
Up to 500+ lumens per foot with 95+ CRI / 90+ R9.

Date \_\_\_\_\_

Project Notes \_\_\_\_\_



**RECOMMENDED CHANNELS**

MODEL	DIAGRAM	INCLUDED ACCESSORIES	CONNECTION OPTIONS	IN CHANNEL DIFFUSION	TECHNICAL RATINGS	MOUNTING OPTIONS WITH DIMENSIONS
<b>20mm Round Channel</b> DI-CPCHB-RC20  (RC20) 48", 96" Aluminum For 14mm Tape Lights or smaller	Height (H): 1.18 in. Width (W): 1.18 in. Interior Width (IW): 0.84 in.  	48 in. channel & frosted lens 2x surface mounting clips End caps: 1x open, 1x closed.  96 in. channel & frosted lens 4x surface mounting clips End caps: 2x open, 2x closed.	 14mm Tape Light: Soldered Lead Only	Classic Frosted Lens VLX5: Dotless	<ul style="list-style-type: none"> <li>• Beam Angle: 180°</li> <li>• Classic Frosted Lens</li> <li>• Light Loss: 20%</li> <li>• CCT Shift: -40K</li> <li>• IP Rating Shift: IP40</li> </ul>	 U-Clip: 1.19 x 1.19 in. (H x W)
<b>20mm Square Channel</b> DI-CPCHB-SQC20  (SQ20) 48", 96" Aluminum For 14mm Tape Lights or smaller	Height (H): 1.18 in. Width (W): 1.18 in. Interior Width (IW): 0.84 in.  	48 in. channel & frosted lens 2x surface mounting clips End caps: 1x open, 1x closed.  96 in. channel & frosted lens 4x surface mounting clips End caps: 2x open, 2x closed.	 14mm Tape Light: Soldered Lead Only	Classic Frosted Lens VLX5: Dotless	<ul style="list-style-type: none"> <li>• Beam Angle: 180°</li> <li>• Classic Frosted Lens</li> <li>• Light Loss: 20%</li> <li>• CCT Shift: -40K</li> <li>• IP Rating Shift: IP40</li> </ul>	 U-Clip: 1.19 x 1.19 in. (H x W)
<b>1-inch Mud-In Channel</b> DI-CPCHB-MUD1  (MI1) 48", 96" Aluminum For 14mm Tape Lights or smaller	Height (H): 0.54 in. Width (W): 2.42 in. Interior Width (IW): 0.81 in. Cut Out Width (CO): 1.19 in.  	96 in. channel & opal lens 2x surface mounting clips End caps: 2x open, 2x closed.	 14mm Tape Light: Soldered Lead Only	Opal Lens VLX5: Dotless	<ul style="list-style-type: none"> <li>• Beam Angle: 120°</li> <li>• Opal Lens</li> <li>• Light Loss: 55%</li> <li>• CCT Shift: -200K</li> <li>• IP Rating Shift: IP40</li> </ul>	 Recessed Mount: 0.54 x 2.42 in. (H x W)
<b>2-inch Mud-In Channel</b> DI-CPCHB-MUD2  (MI2) 48", 96" Aluminum For 14mm Tape Lights or smaller	Height (H): 0.8 in. Width (W): 3.86 in. Interior Width (IW): 1.84 in. Cut Out Width (CO): 1.97 in.  	96 in. channel & opal lens 2x surface mounting clips End caps: 2x open, 2x closed.	 14mm Tape Light: Soldered Lead Only	Opal Lens VLX5: Dotless	<ul style="list-style-type: none"> <li>• Beam Angle: 120°</li> <li>• Opal Lens</li> <li>• Light Loss: 55%</li> <li>• CCT Shift: -200K</li> <li>• IP Rating Shift: IP40</li> </ul>	 Recessed Mount: 0.8 x 3.86 in. (H x W)

### VALENT® X Wet Location 24V High Density LED Tape Light

Precision-engineered, high density tape light for wet locations (IP65). Up to 500+ lumens per foot with 95+ CRI / 90+ R9.

Date \_\_\_\_\_

Project Notes \_\_\_\_\_



### RECOMMENDED 24V DRIVERS

SKU	INPUT VOLTAGE / FREQUENCY	OUTPUT VOLTAGE	MAXIMUM LOAD	MINIMUM LOAD	CLASS 2	DIMMABLE	LENGTH	WIDTH	HEIGHT
<b>OMNIDRIVE® X Dimmable Driver</b> Versatile driver for most high-performance dimming on ELV, TRIAC, and 0-10V systems. <a href="https://www.diodeled.com/custom/download/productFile/filename/omnidrive-x-specification-sheet.pdf">https://www.diodeled.com/custom/download/productFile/filename/omnidrive-x-specification-sheet.pdf</a>									
OMNIDRIVE® X Dimmable Driver Specification Sheet Contains: • Additional Models • Derating Curves • Additional Features • System Diagrams									
DI-ODX-24V30W-J	120-277V	24V	30W	No Minimum Load	Yes	Yes	6.5 in.	3.7 in.	1.57 in.
DI-ODX-24V60W-J	120-277V	24V	60W	No Minimum Load	Yes	Yes	7.4 in.	3.7 in.	1.57 in.
DI-ODX-24V96W-J	120-277V	24V	96W	No Minimum Load	Yes	Yes	8.66 in.	3.7 in.	1.57 in.
DI-ODX-24V120W-J	120-277V	24V	120W	No Minimum Load	No	Yes	8.66 in.	3.7 in.	1.57 in.
<b>VLM Series Constant Voltage Driver</b> Compact driver for on/off, PWM dimming, and color-changing applications. <a href="https://www.diodeled.com/custom/download/productFile/filename/VLM-Specification%20Sheet%20(Driver%20&amp;%20J-Box).pdf">https://www.diodeled.com/custom/download/productFile/filename/VLM-Specification%20Sheet%20(Driver%20&amp;%20J-Box).pdf</a>									
VLM Series Constant Voltage Driver Specification Sheet Contains: • Additional Models • Derating Curves • Additional Features • System Diagrams									
VLM60W-24-LPS3R	120 / 277VAC 47 - 63Hz	24V	60W	No Minimum Load	Yes	PWM	10.79 in.	7.34 in.	2.36 in.
VLM60W-24-LPM	120 / 277VAC 47 - 63Hz	24V	60W	No Minimum Load	Yes	PWM	8.19 in.	2.94 in.	1.31 in.
VLM100W-24-LPS3R	120 / 277VAC 47 - 63Hz	24V	100W	No Minimum Load	Yes	PWM	10.79 in.	7.34 in.	2.36 in.
<b>MEANWELL Constant Voltage Driver</b> Drivers for on/off or PWM dimming applications. <a href="https://www.diodeled.com/custom/download/productFile/filename/commercial-grade-CV-Driver-Specification%20Sheet%20(24V%20Models).pdf">https://www.diodeled.com/custom/download/productFile/filename/commercial-grade-CV-Driver-Specification%20Sheet%20(24V%20Models).pdf</a>									
MEANWELL Constant Voltage Driver Specification Sheet Contains: • Additional Models • Derating Curves • Additional Features • System Diagrams									
DI-CV-MW24V60W-277-LPS3R	120 ~ 277VAC 50/60Hz	24V	60W	No Minimum Load	Yes	Yes, with compatible PWM dimmer/controls	10.79 in.	7.34 in.	2.36 in.
DI-CV-MW24V60W-277-LPS	120 ~ 277VAC 50/60Hz	24V	60W	No Minimum Load	Yes	Yes, with compatible PWM dimmer/controls	11.25 in.	3.75 in.	1.9 in.
<b>PoE (Power over Ethernet)</b> Constant voltage platform, ready for Power over Ethernet (inquire)									

### RECOMMENDED CONTROLLERS

SKU	DESCRIPTION
<b>CASAMBI® Controllers</b> The CASAMBI controllers will remotely control your lighting through the app - downloadable for IOS & Android.	
CBU-PWM4	CASAMBI PWM4 Single Color Dimming Controller
CBU-A2D	CASAMBI A2D 2 Channel 0-10V/DALI Controller
CBU-ASR	CASAMBI ASR 0-10V Controller
CBU-TED	CASAMBI TED AC High Voltage Controller
<b>SWITCHEX® Driver and Dimmer Switch</b> LED driver and dimmer switch combined in a single gang box.	
DI-12V-SE-40W	SWITCHEX 12V Switch/Driver Combo - 40W
DI-12V-SE-60W	SWITCHEX 12V Switch/Driver Combo - 60W



**VALENT® X Wet Location 24V**  
High Density LED Tape Light

Precision-engineered, high density tape light for wet locations (IP65).  
Up to 500+ lumens per foot with 95+ CRI / 90+ R9.

Date \_\_\_\_\_

Project Notes \_\_\_\_\_



12  
Year  
Warranty

IP65


24  
VDC

NEC  
RATED FOR WET LOCATIONS  
CLOSET RATED


TITLE  
24

**MECHANICAL DIAGRAMS**

24V-VLX5

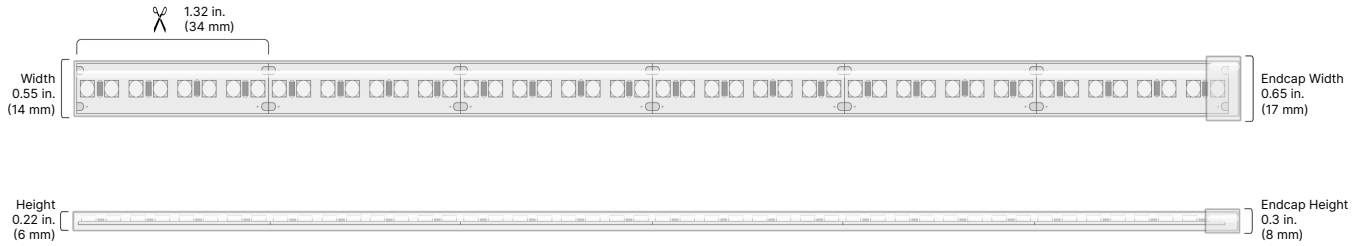

**CONNECTIONS**

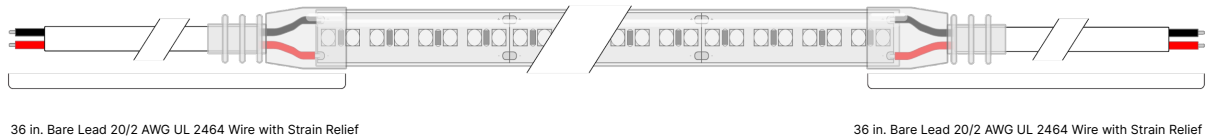

**VALENT® X Wet Location 24V**  
High Density LED Tape Light

Precision-engineered, high density tape light for wet locations (IP65).  
Up to 500+ lumens per foot with 95+ CRI / 90+ R9.


Date \_\_\_\_\_

Project Notes \_\_\_\_\_




**ACCESSORIES**

**Soldered Lead Only**

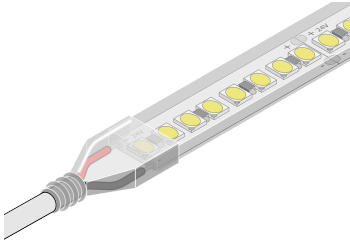


**DI-WLMC-12MM**

12mm Tape, Wet Location Over Clips, 10 pack, with 20 screws




**DI-WL-12MM-EC-5**

Wet Location Strip End Caps, 12mm Tape, Silicone, 5-pack (5 open, 5 closed)



**DI-WPSL**

Wet Location Sealant



**DELIVERY OPTIONS**

- **Field Assembly**  
Fastest order fulfillment. Field connectors and accessories not included.
- **Factory + Field (Hybrid)**  
Onsite modifications with factory connection. Additional accessories not included.
- **Factory Assembly**  
Fastest Installation. Factory made-to-order fixtures.

- Lumen value measured in accordance to IES LM-80-08. LED chips have a luminous flux range with a tolerance of +/- 5%.
- Each maximum run requires a dedicated power feed from the driver. Do not extend beyond the recommended maximum run length. Max run may exceed Class 2 limit. Actual wattage may differ from calculated wattage due to voltage drop across run.
- Do not install product in an environment outside the listed ambient temperature. Exceeding the maximum ambient temperature may damage LED chips, reduce the total lamp life, lumen output, and/or adversely impact color consistency.
- Actual efficacy value is dependent to specified LED driver (power supply). An estimated efficacy value can be calculated as follows: Lumen value divided by average power consumption per foot.
- Operating temperature is measured according to the minimum and maximum ambient temperature environment.



### VALENT® X Wet Location 24V

#### High Density LED Tape Light

Precision-engineered, high density tape light for wet locations (IP65).  
Up to 500+ lumens per foot with 95+ CRI / 90+ R9.

Date \_\_\_\_\_

Project Notes \_\_\_\_\_



## CERTIFICATIONS

### Safety

- UL Listed 2108 Low Voltage Lighting System / Low Voltage Luminaire. UL 1598 / CSA 250.0-08, UL 8750. UL 879 / CAN/CSA-C22.2 no. 207-M89. Certified for United States and Canada. File # E469769.
- UL Listed Field Cuttable.
- CE & EMC Compliant: Verification No. GZEM141200683705V
- Approved for storage areas of clothes closets per NEC 410.16.A.1,3 and 410.16.C.1,3,5

### Environment

- Ambient Temperature: -4 ~ 122°F (-20 ~ 50°C)
- Operating Temperature: -4 ~ 176°F (-20 ~ 80°C)
- RoHS Compliant: Verification No. CANEC1610091501

### Performance

- Can be used to comply with TITLE 24 Part 6 High Efficacy Lighting LED requirements - JA8-2016-2022-E
- LED chip data measured in accordance to IES LM-80-08.
- Photometric & Colorimetry data measured in accordance to IES LM-79-08, in Elemental LED's Innovation Lab.

## Safety / Warnings / Disclosures

1. Install in accordance with national and local electrical code regulations.
2. This product is intended to be installed and serviced by a qualified, licensed electrician.
3. Only use copper wiring. Use wires rated for at least 176°F (80°C) and certified for use with external connection of electrical equipment.
4. Each maximum run requires a dedicated power feed from the driver. Do not extend beyond the recommended maximum run length.
5. Tape light, attached wire leads, and additional extension cables, connectors, etc., are not rated for in-wall installation unless otherwise noted. Tape light and attached wire leads are field-cuttable.
6. Ensure applicable wire is installed between driver, fixture, and any controls in-between. When choosing wire, factor in voltage drop, amperage rating, and type (in-wall rated, wet location rated, etc.). Inadequate wire installation could overheat wires, and cause fire.
7. Do not install in environment where LED chips are exposed to direct sunlight as damage to the phosphor will occur.
8. Do not install in environment where excessive heat may exist (ex. close proximity to fireplace, etc.) See Ambient Temperature ratings
9. Do not install indoor LED tape light products in outdoor / wet location environments. Only wet location tape light models are rated for outdoor / wet locations.
10. Do not modify product beyond instructions or warranty will be void.
11. Tape light must be handled with care. Excessive handling, bending, and pressure may damage the product, voiding the warranty.
12. Actual color may vary from what is pictured on this sheet and other print materials due to the limitations of photographic processes.
13. We reserve the right to modify and improve the design of our fixtures without prior notice. We cannot guarantee to match existing installed fixtures for subsequent orders or replacements in regards to product appearance, CCT, or lumen output.

## WARRANTY

### Limited Warranty

- 12 Year limited warranty

This warranty does not include the additional accessories referenced in this specification sheet. Complete warranty details for fixtures and additional accessories are available at [www.diodeled.com/limited-warranty/](http://www.diodeled.com/limited-warranty/) within the Policies section. For warranty related questions please contact product support.

### Consumer's Acknowledgment

Elemental LED, Inc. stands behind its products when they are used properly and according to our specifications. By purchasing our products, the purchaser agrees and acknowledges that lighting design, configuration and installation is a complex process, wherein seemingly minor factors or changes in layout and infield adjustments can have a significant impact on an entire system. Choosing the correct components is essential. Elemental LED is able to work with the original purchaser to make an appropriate product selection to the extent of the limited information that the customer can provide, but it is virtually impossible for Elemental LED to design a system that foresees every unknown factor. For this reason, this Warranty does not cover problems caused by improper design, configuration or installation issues. Any statement from a Elemental LED employee or agent regarding a customer's bill of goods and/or purchase order is NOT an acknowledgment that the products purchased are designed and configured correctly. The purchase agrees and acknowledges that it is the customer's responsibility to adhere strictly to all information contained in the Product Specification Sheets.

There is often more than one way to design, configure and layout an LED lighting application properly to achieve the same lighting effect. Elemental LED strongly recommends that licensed professionals be used in the design and installation of lighting systems that include Elemental LED products. The specifications include important information that a designer and installer should carefully review and strictly follow. Qualified designers and certified and/or licensed installers, with access to the final installation environment, customer goals, and Elemental LED product specifications can make the requisite decisions appropriate for a successful finished lighting application.